



Uchwyt transportowy ze sworzniem - OMD Lifting bracket with lifting bolt - OMD




Material/Material: 1.1191

Wytrzymałość:
Tensile strength: 800÷1000 N/mm²

Uwaga/Remark: dostarczany ze sworzniem OMP / supplied with lifting bolt OMP

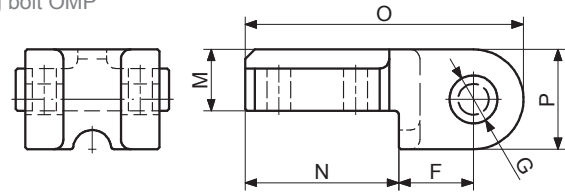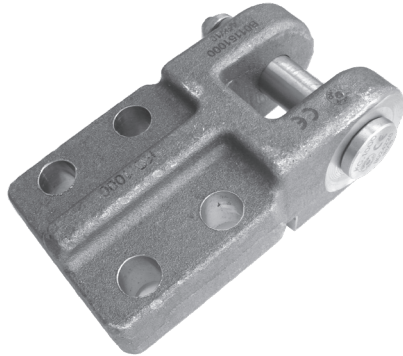


Typ A / Type A

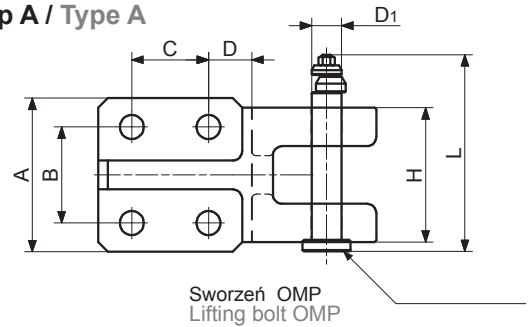


Typ A / Type A

Udźwig (kg) Capacity (kg)	D ₁	L	A	B	C	D	F	G	H	M	N	O	P	Mocowanie Screw	Nr katalogowy Item no.
600	15,6	102,5	80	50	40	22,5	39	16	70	32	80	145	52	M12X45	OMD-0600
1000	20,6	113,5	90	60		27,5	42	21	79	36	90	160	56	M16X55	OMD-1000
2000	25,6	128,5	100	65	65	32,5	60	26	90	50	120	215	70	M20X80	OMD-2000

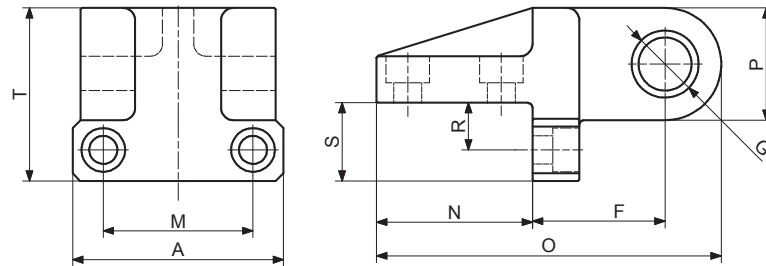

Typ B / Type B

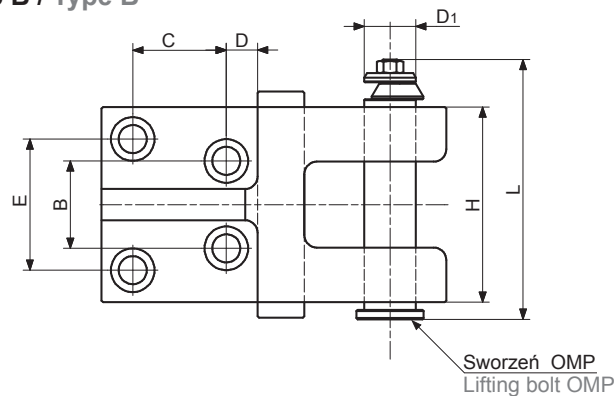

Typ B / Type B

Udźwig (kg) Capacity (kg)	D ₁	L	A	B	C	E	D	F	G	H	M	N	O	P	R	S	T	Mocowanie Screw	Nr katalogowy Item no.
4000	33	166,5	135	56	60	84	20	85	34	125	96	100	221	72	30	50	111	M16X45	OMD-4000
7000	43	210,5	180	80	70	110	30	100	44	160	130	125	270	90	35	60	140	M20X60	OMD-7000